

## Weigh Gauge Algorithms

HARRY H. LAMB<sup>1</sup> and YVES DUROCHER<sup>1</sup>

### ABSTRACT

Weighing gauge algorithms in common use by meteorological services and others traditionally apply a fixed threshold to the difference between the most recent and previous measurements to determine whether precip has occurred. The threshold, intended to eliminate noise primarily caused by wind pumping, will vary from gauge to gauge and region to region. These simple algorithms do not meet the needs of modern climate networks.

Four new algorithms have been developed, three at the Meteorological Service of Canada. The fourth was developed earlier by the Swedish Meteorological Institute. These algorithms require minutely data, which is normally an average of five second samples.

Although this effort was made necessary with the incorporation of the very sensitive Geonor weighing gauge into the Environment Canada surface weather/RCS network, the results may be applied to other gauges.

Keywords: threshold, noise, wind pumping, diode effect, Four new algorithms, Geonor

### INTRODUCTION

Weighing gauge algorithms in common use by meteorological services and others traditionally apply a fixed threshold to the difference between the most recent and previous measurements to determine whether precip has occurred. The threshold, intended to eliminate noise primarily caused by wind pumping, will vary from gauge to gauge and region to region.

Some algorithms allow the measured weight to decrease as well as increase where others permit increases only. Where decreases are permitted, evaporation becomes a factor unless prevented with a layer of oil. Where decreases are not permitted, the diode effect will allow any noise which exceeds the threshold to appear as increases in weight. Depending on the characteristics of an algorithm, light precip which does not exceed the threshold may be lost completely or may eventually be counted much later than the actual event.

Normally, the data logger program at Environment Canada autostations (auto 7) takes measurements every five seconds and calculates minutely averages. The weighing gauge output that is reported is 15 minute data. To do algorithm development, we require minutely data. In late

---

<sup>1</sup> Meteorological Service Of Canada, Downsview, Ontario

November of 2002, Quebec Region provided Surface Weather and Climate Division with minutely data from their Quebec City site covering the period from September 12 at 14:30 through November 22 at 09:00.

This effort was made necessary with the incorporation of the very sensitive Geonor weighing gauge into the Environment Canada surface weather/RCS network. However, the results of the effort may be applied to other gauges, such as the Belfort (Fischer & Porter). Algorithms developed here will not be applied to the Pluvio as that gauge is a smart sensor with a built in algorithm and MSC wishes to gain experience with its performance.

## **RAW DATA**

The raw data, provided in an EXCEL workbook and containing numerous flaws, was put through a two stage automatic quality assurance test which set limits on the rate of change for the minute and the previous minute. If the test passed for the present minute, then the previous minute was tested. A failure of either test failed the data for that minute, in which case, the last accepted raw data was maintained for that minute. This eliminated all serious amplitude change flaws.

There were other problems with the data of a much more serious nature:

1) From September 12 to October 9, the data was 15 minutely for 22 hours per day from 17:00 to 15:00 and minutely from 15:00 to 17:00. This created a severe accordion effect in the time scale as well as distorting any precip events that occurred during that period.

2) There was a gap of missing data on October 9 from 17:00 to 21:00.

3) There was a gap of missing data from Oct 10 @ 19:00 to Oct 11 @ 03:00.

4) Data is erratic and zero or negative on October 11 from 03:00 to 15:11.

5) There was a six day gap from October 18 to October 24.

6) Where there was minutely data, at minutes 0, 15, 30 and 45, the data occurred twice. This flaw represents about 12% of the data and is distributed throughout the data.

Although the original data file is retained, the QA'd file discards all data from September 12 to October 11 at 15:15. Additionally, there is no precipitation activity after late afternoon on November 20 and all data after this point was discarded. Therefore, this report covers the period from October 11 at 15:15 through November 21 at 02:12.

The QA'd raw data is adequate for algorithm development and is shown in the GRAPHS—RAW DATA. These algorithms will need to be tested against other data sets.

## **FILTER METHOD**

This method was created by Surface Weather and Climate Division while developing the first versions of the standard data logger program before receiving the Quebec City data set. Minutely means are produced from 5 second samples. The averages are input to a 3 minute boxcar (running) average. The output of the 3 minute boxcar is input to a 9 minute boxcar, whose output is taken as the measured weight. If a step is applied to the weight in the gauge, it will take the measured weight output 12 minutes to reach full value.

Because the 9 minute boxcar is a smooth version of the minutely means, it can decrease should evaporation occur. An evaporation correction is calculated by inputting the measured weight to a 30 minute boxcar which is input to a 90 minute boxcar. This gives a very slow response smooth output which can be used to determine if evaporation has taken place.

The algorithm, updated minutely, may be expressed as follows:

box 1(i) = avg last 3 minutes

box 2(i) = avg [box 1(i), box 1(i-1), , , box 1(i-8)]

box 3(i) = avg [box 2(i), box 2(i-1), , , box 2(i-29)]

box 4(i) = avg [box 3(i), box 3(i-1), , , box 3(i-89)]

if box 4(i-15) – box 4(i) > 0.08  
 then evap(i) = [box 4(i-15) – box 4(i)]/15, else 0

acc(i) = box 2(i) + evap(i)

The 15 minute amounts were taken as acc(i) – acc(i-15).

After the Quebec City data set was received, it was found that the accumulation of the 15 minute amounts considerably exceeded the accumulation, acc(i), due to the low level of noise that still remained on box 2. A longer boxcar could not be used because of the excessive time response.

A significant improvement was made to the 15 minute amounts by synchronizing them to the hourly amount. The algorithm is as follows:

if acc(15) – acc(0) > 0.2  
 then amt(15) = acc(15) – acc(0), else 0

if acc(30) – acc(0) > 0.35  
 then amt(30) = acc(30) – acc(0) – amt(15), else 0

if acc(45) – acc(0) > 0.5  
 then amt(45) = acc(45) – acc(0) – amt(30) – amt(15), else 0

if acc(60) – acc(0) > 0.65  
 then amt(0) = acc(60) – acc(0) – amt(45) – amt(30) – amt(15), else 0

acc(0) = acc(60)

## NOISE THRESHOLD METHODS

### Introduction

Noise threshold methods take some combination of average, maxima, minima and a noise related term over some length of time to test against a previous accumulation to determine if accumulation should be updated. With these methods, noise does not appear in the results so the accumulation of 15 minute amounts is the same as the accumulation.

### Swedish Method

In May of 2003, Surface Weather and Climate Division obtained a copy of an algorithm, recently developed by the Swedish Met Institute, which is a noise threshold method. The algorithm, performed minutely and providing a 15 minutely update, is as follows:

```
if T = 0 minutes into a 15 minute interval
  then max = corr(0) and min = corr(0)

if acc(i) > max
  then max = acc(i) and min = acc(i)

if acc(i) < min
  then min = acc(i)

if T = 0 minutes into a 15 minute interval
  if min > corr(0) + x(max - min)
    if acc(15) - acc(0) > y
      then corr(15) = min, else corr(15) = corr(0)
```

useful range of x, y; 0 to 2, 0 to 0.05

This algorithm resets at the beginning of each 15 minute interval. Each minute during the interval, the algorithm checks for maxima and minima. If there is a maximum, the minimum is reset to the maximum. The algorithm is looking for the minimum that occurs after the maximum. At the end of the 15 minutes, if the minimum is greater than the sum of the corrected accumulation at minute 0 and a noise dependent term and if the difference in measured accumulation over the 15 minutes is greater than a fixed threshold, then the corrected accumulation is set to the minimum.

### Max Min Method

At the same time the filter method was being developed, Surface Weather and Climate Division was also developing a method utilizing the properties of the noise on the minutely means. While not originally a noise threshold method, it was a precursor. The algorithm, updated minutely, is as follows:

$$\text{acc}(i) = \min\{(\text{max last 15}), \text{max}[(\text{min last 15}), \text{acc}(i-1)]\}$$

Although noise does not appear in the result, it does affect the result and accumulation increases significantly faster than it should.

The algorithm was then modified to a noise threshold method by retaining only the second term in the outer brackets and adding a noise related term, with dramatic improvement in results. The algorithm, updated minutely, is as follows:

$$\text{acc}(i) = \max\{[\text{min last 15} - x(\text{max last 15} - \text{min last 15})], \text{acc}(i-1)\}$$

useful range of x, 0 to 0.5

Running boxcars are maintained on both the minima and maxima of the last 15 minutes. Whenever the minimum, reduced by a noise related term, exceeds the previous accumulation, the accumulation is set equal to the new value.

### **Boxcar Method**

This method, developed by Surface Weather and Climate Division, is a derivation of the filter method where the 3 minute boxcar and the evaporation correction have been dropped. Only the 9 minute boxcar has been retained and a noise related term added, which considerably improves results and reduces the response time from 12 to 9 minutes. The algorithm, updated minutely, is as follows:

$$\text{if avg last 9} - x(\text{max last 15} - \text{min last 15}) > \text{acc}(i-1)$$

$$\text{then acc}(i) = \text{avg last 9} \text{ else acc}(i) = \text{acc}(i-1)$$

useful range of x, 0 to 0.5

Running boxcars are maintained on both the minima and maxima of the last 15 minutes. Whenever the 9 minute boxcar, reduced by a noise related term, exceeds the previous accumulation, the accumulation is set equal to the new boxcar value.

### **RESULTS**

The results are given in the the various GRAPH sections. All the algorithms perform well and are very close to each other and to the raw data. Because of this, the curves have been given negative offsets of -1, -2, -3, -4, -5 and -6 mm relative to the raw data, larger offsets being assigned to curves with larger time delay to minimize crossovers.

In GRAPHS—FILTER METHOD, five curves are shown:

QA'd raw data one minute means.

Nine minute boxcar and accumulation of 15 minute amounts at 100% duty cycle.

Nine minute boxcar and accumulation of 15 minute amounts at 20% duty cycle. In this case, the sensor was powered only for the last three minutes of each 15, the minutely means remaining constant for the first 12 minutes.

In GRAPHS—NOISE THRESHOLD METHODS, seven curves are shown:

QA'd raw data one minute means.

Max Min, Swedish and Boxcar accumulations at 100% duty cycle.

Max Min, Swedish and Boxcar accumulations at 20% duty cycle.

The graphs present well and are relatively easy to intepret. Table 1 indicates a few things to note.

**Table 1**

	Filter		Noise Threshold		
	accumulation	15min amts	Swedish	MaxMin	Boxcar
Noise sensitivity	some	more	less	less	less
Delay	less	some	some	some	less
Event reproduction	good	fair	fair	good	good
Degradation from 100% to 20% duty	some	some	some	more	less
Difference in accumulation & 15 min amts	yes	yes	no	no	no

**CONCLUSION**

First, the algorithms need to be tested with independent data sets. Given that these tests will confirm the results obtained here, the preferred algorithm would be the boxcar method.

**GRAPHS—RAW DATA**

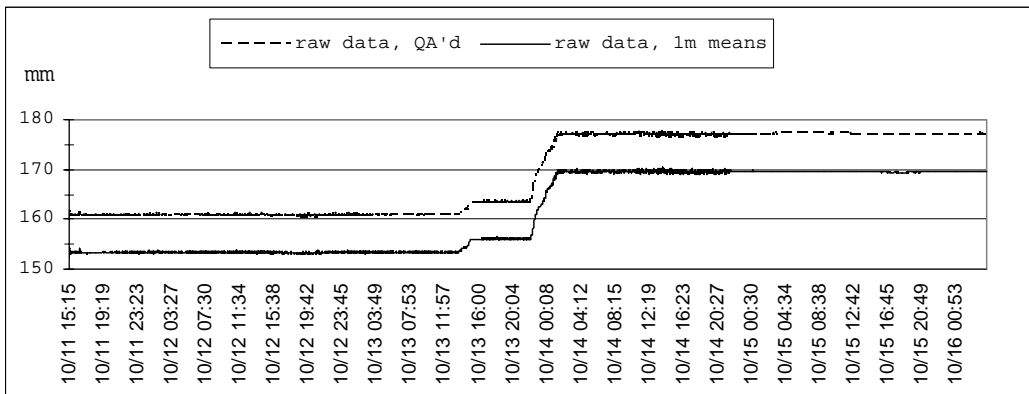


Figure 1. Quebec City minute data, 2002 Oct 11–16

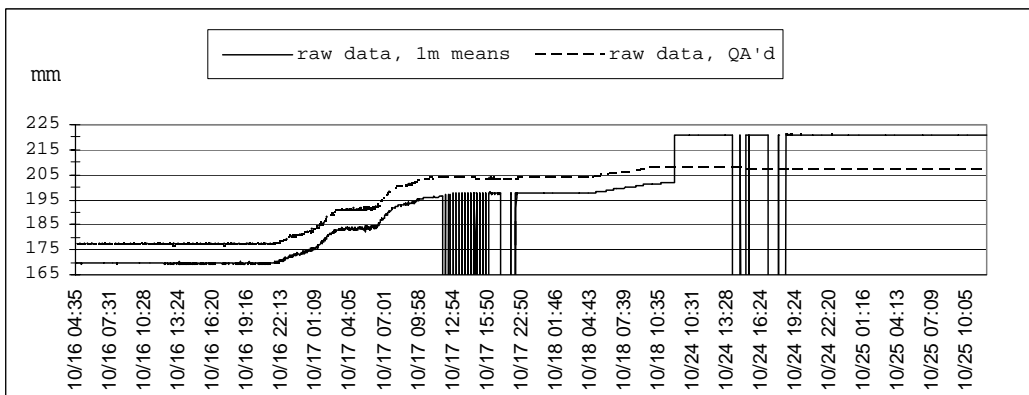


Figure 2. Quebec City minute data, 2002 Oct 16–25

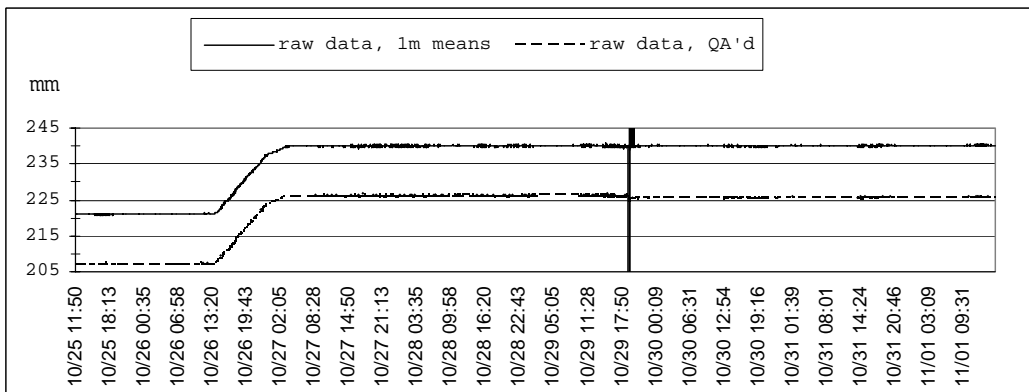


Figure 3. Quebec City minute data, 2002 Oct 25–Nov 1

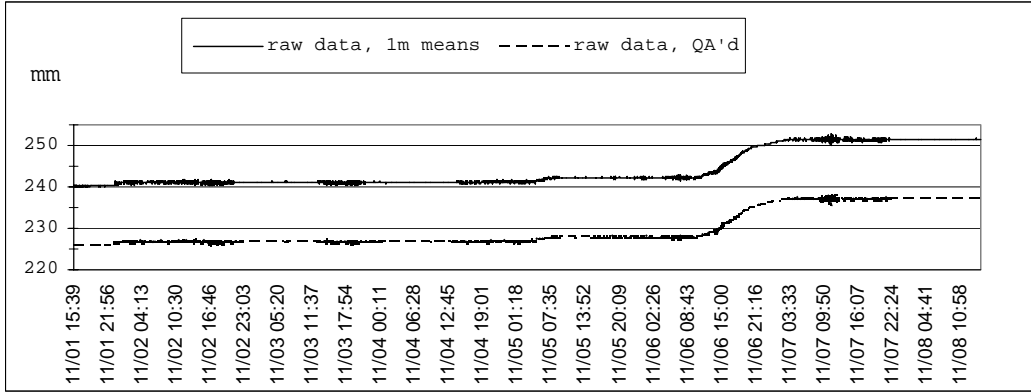


Figure 4. Quebec City minute data, 2002 Nov 1–8

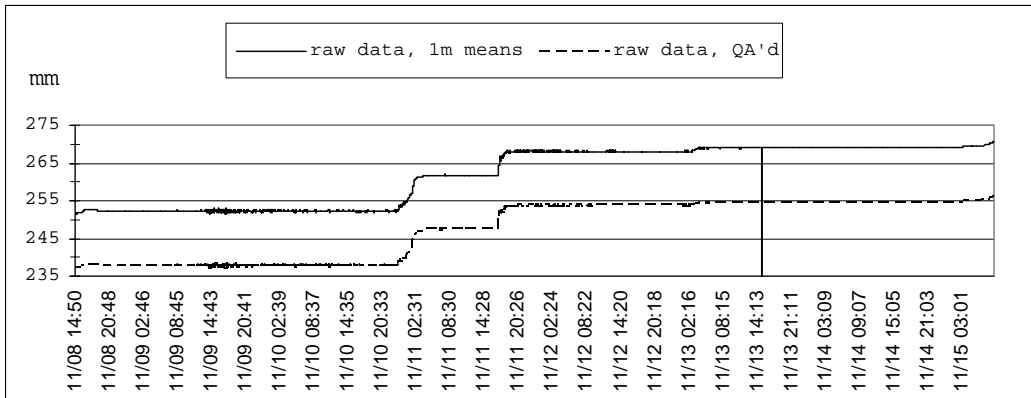


Figure 5. Quebec City minute data, Nov 8–15

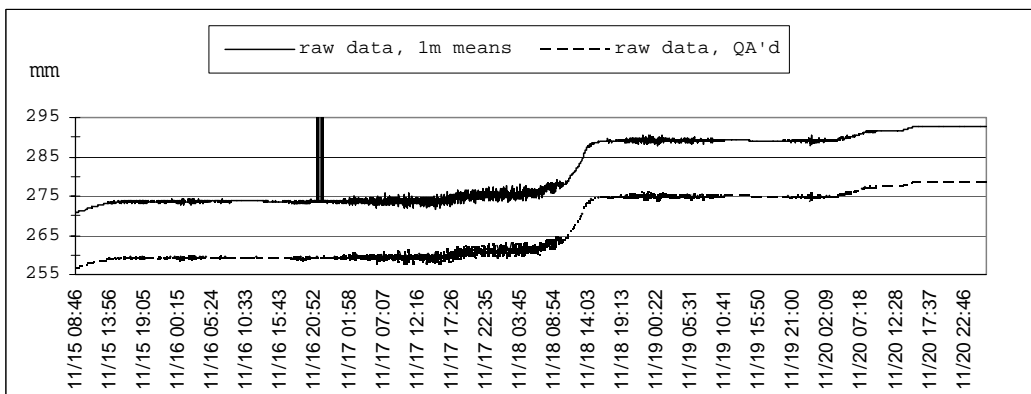


Figure 6. Quebec City minute data, 2002 Nov 15–22



**GRAPHS—FILTER METHOD**

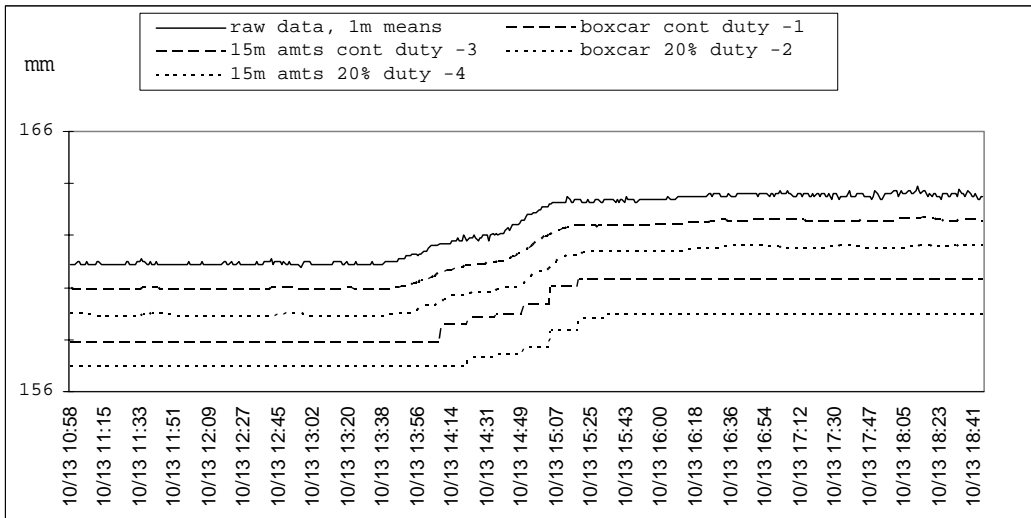


Figure 7. Filter Method, Quebec City minute data, 2002 Oct 13

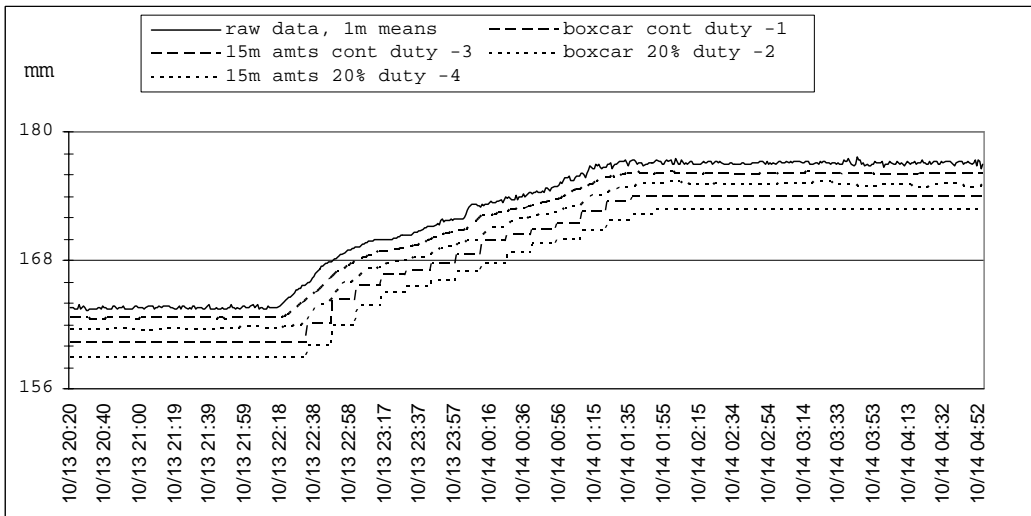


Figure 8: Filter Method, Quebec City minute data, Oct 13–14

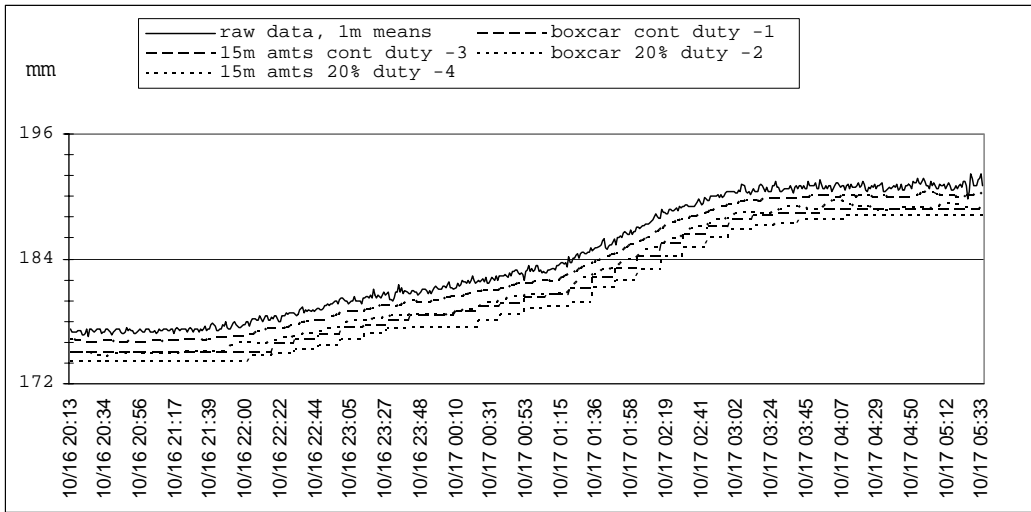


Figure 9: Filter Method, Quebec City minute data, Oct 16–17

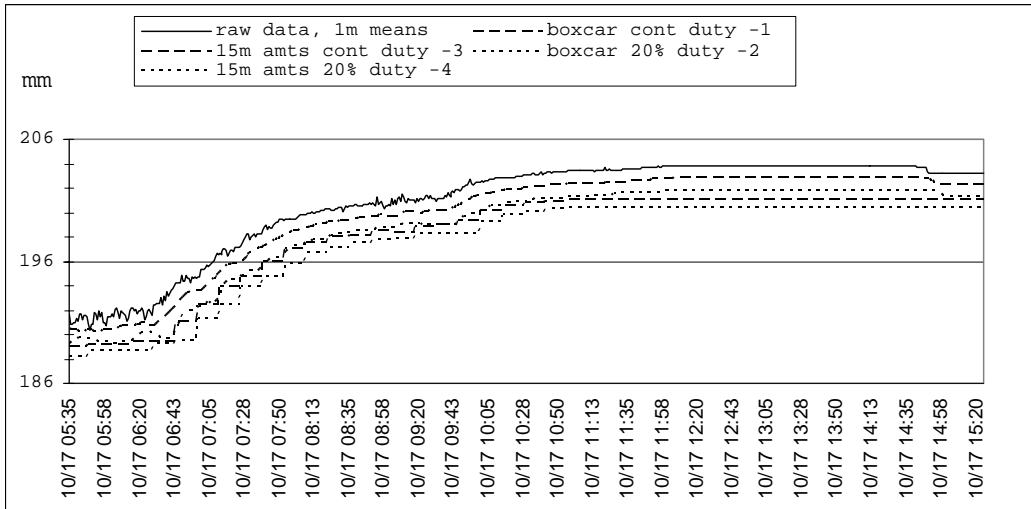


Figure 10: Filter Method, Quebec City minute data, Oct 17

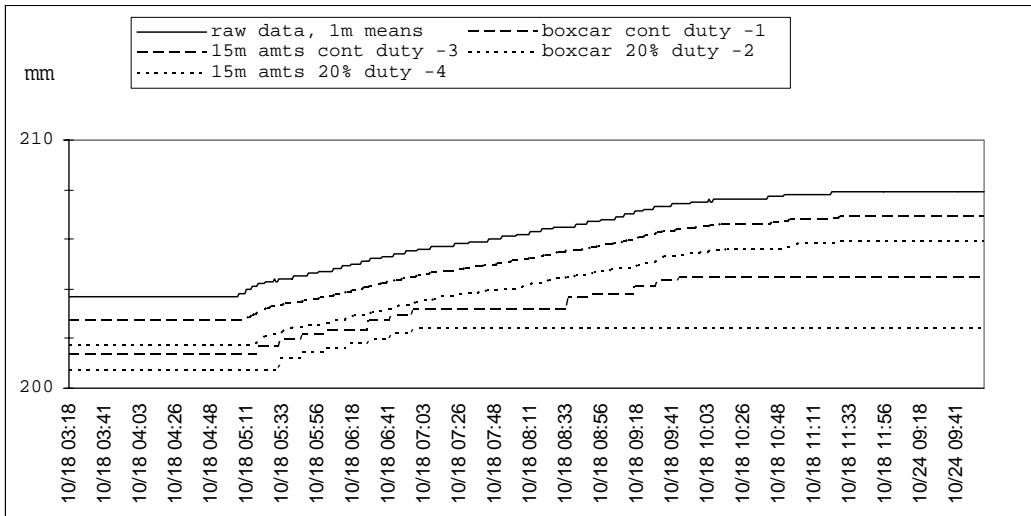


Figure 11: Filter Method, Quebec City minute data, 2002 Oct 18

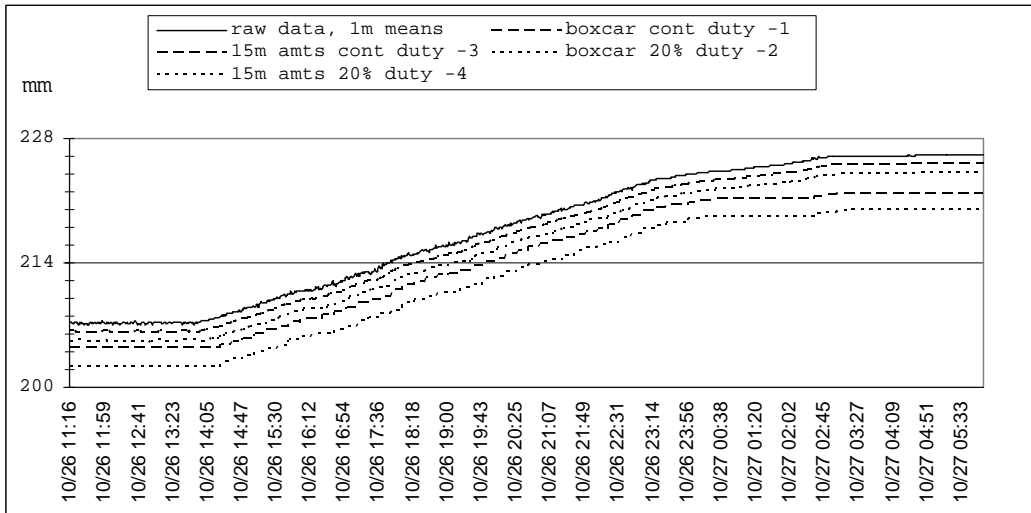


Figure 12: Filter Method, Quebec City minute data, 2002 Oct 26–27

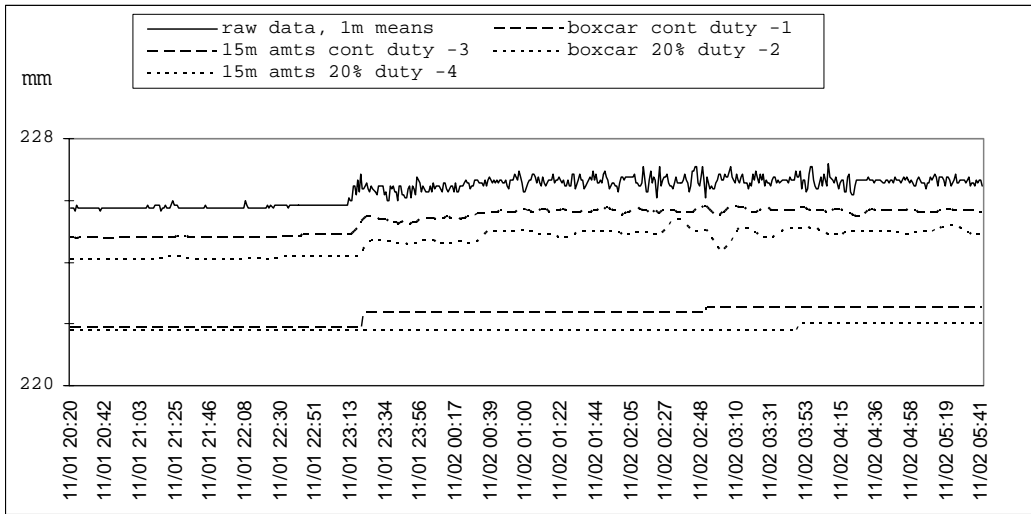


Figure 13: Filter Method, Quebec City minute data, 2002 Nov 1–2

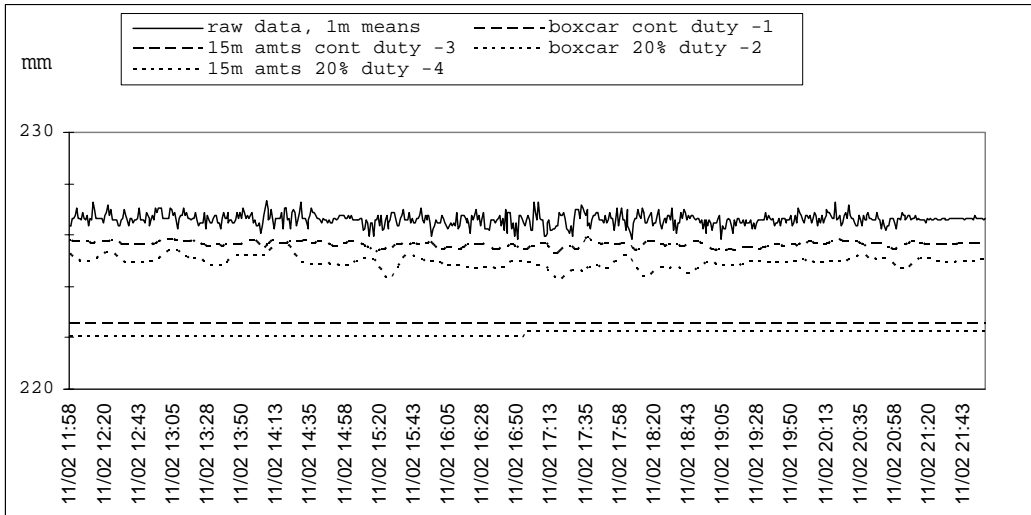


Figure 14: Filter Method, Quebec City minute data, 2002 Nov 2

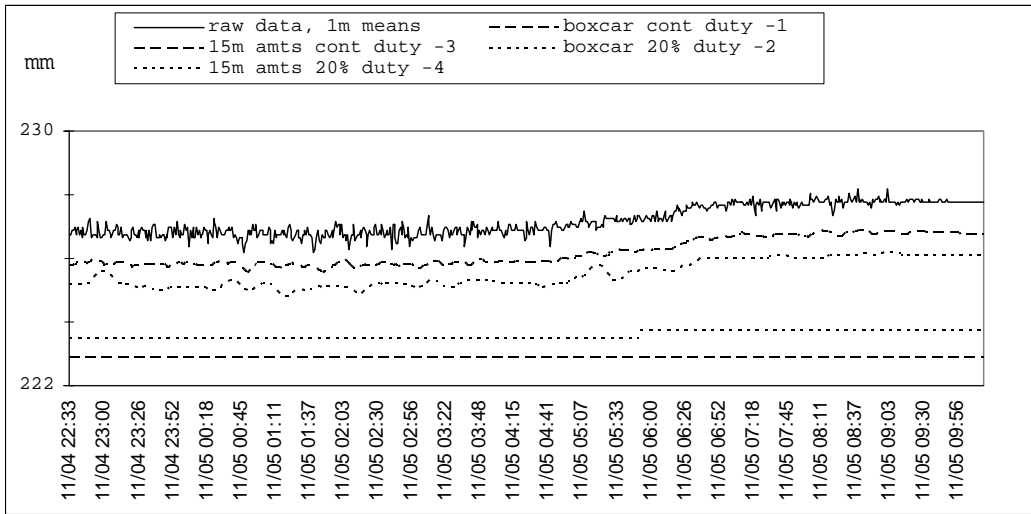


Figure 15: Filter Method, Quebec City minute data, 2002 Nov 4-5

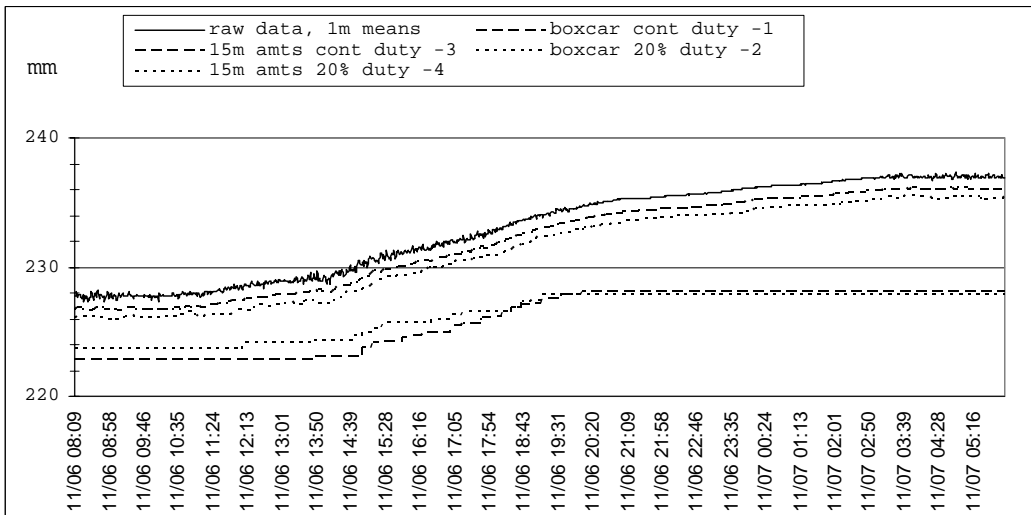


Figure 16: Filter Method, Quebec City minute data, 2002 Nov6

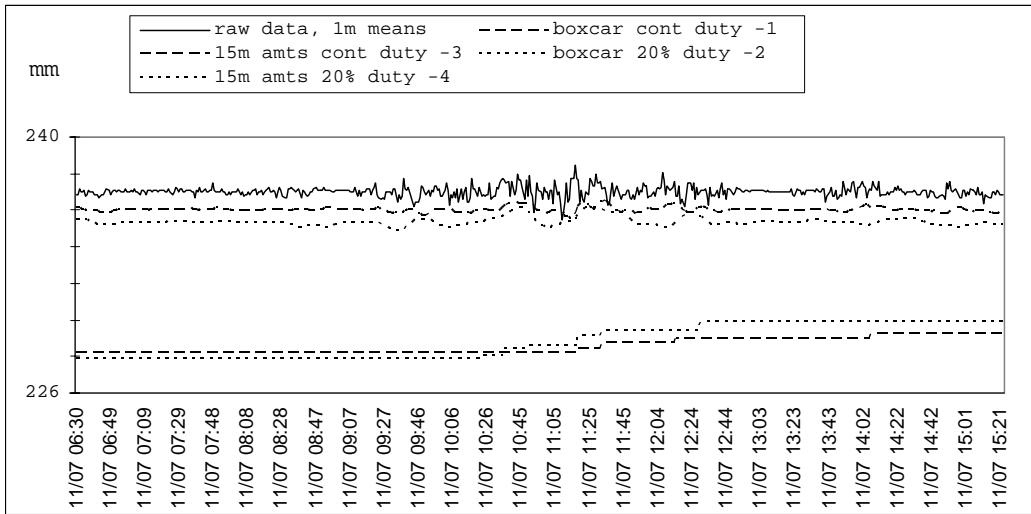


Figure 17: Filter Method, Quebec City minute data, 2002 Nov 7

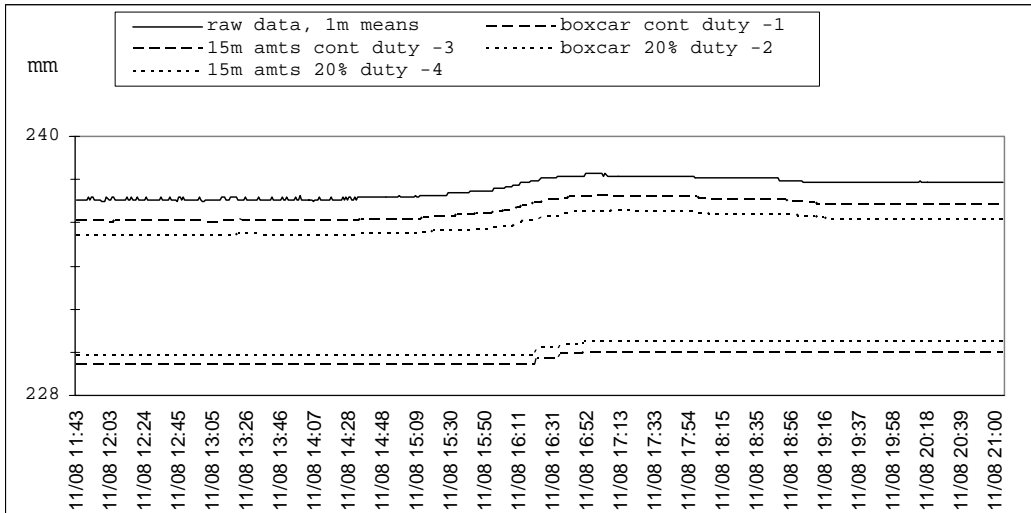


Figure 18: Filter Method, Quebec City minute data, 2002 Nov 8

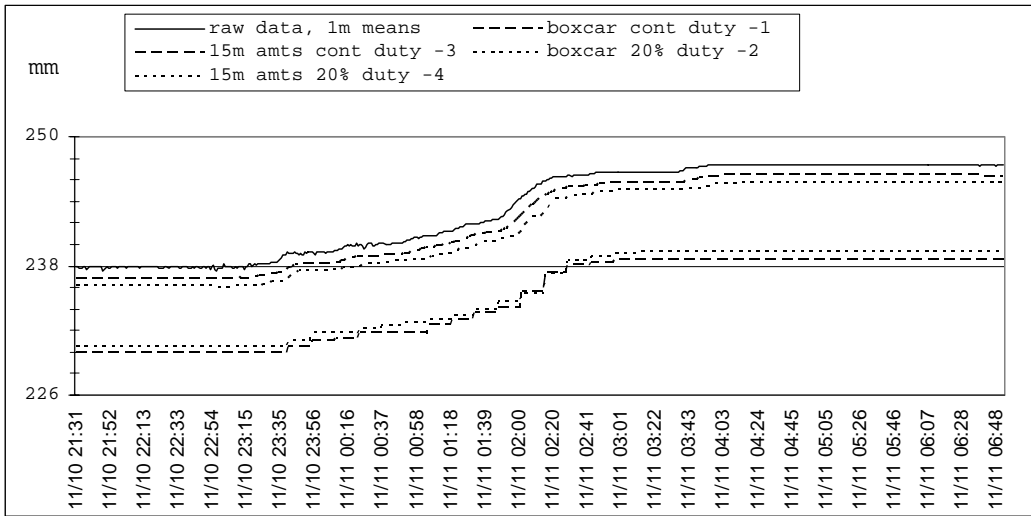


Figure 19: Filter Method, Quebec City minute data, 2002 Nov 10–11

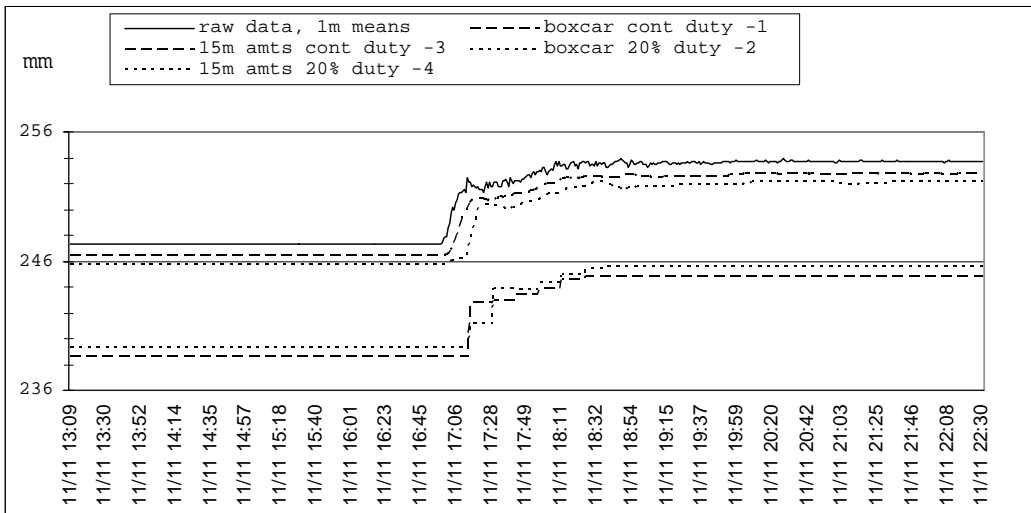


Figure 20: Filter Method, Quebec City minute data, 2002 Nov 11

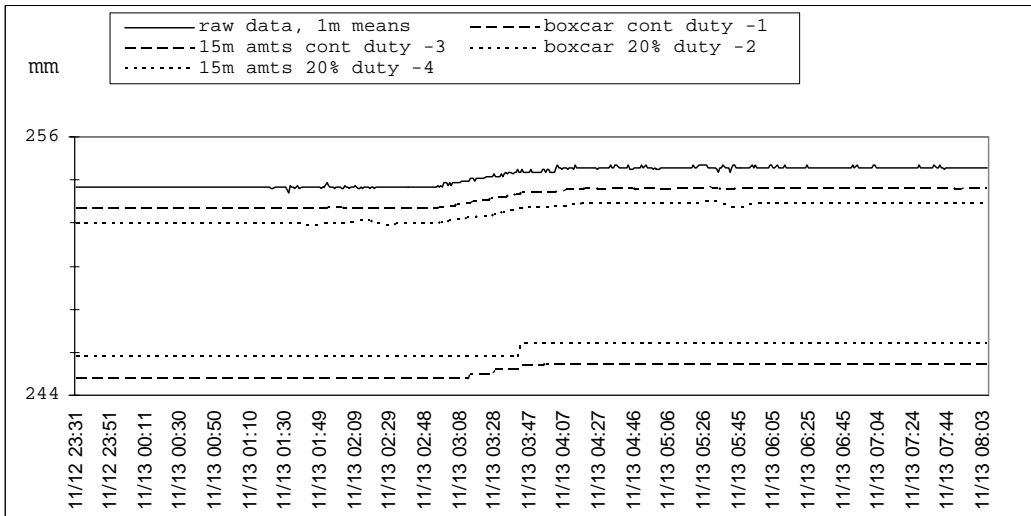


Figure 21: Filter Method, Quebec City minute data, 2002 Nov 13

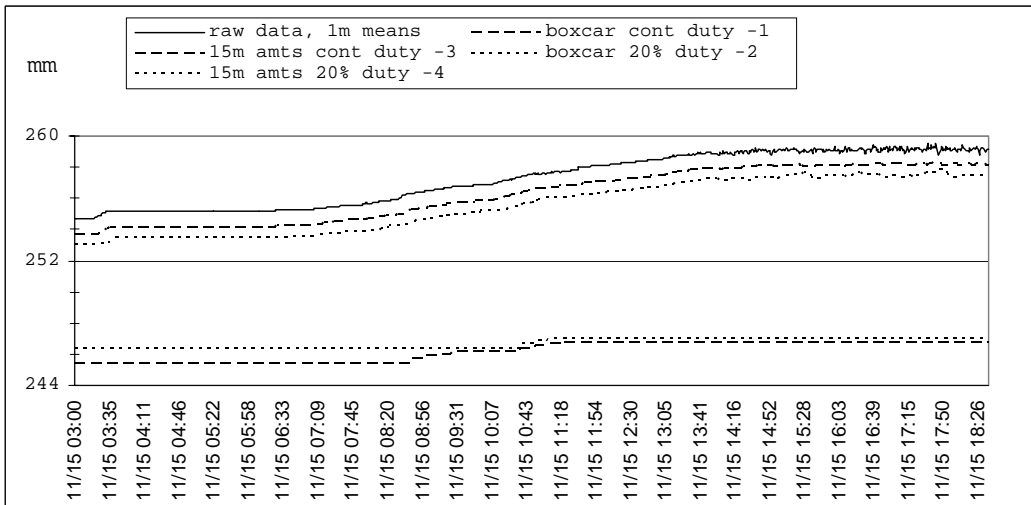


Figure 22: Filter Method, Quebec City minute data, 2002 Nov 15



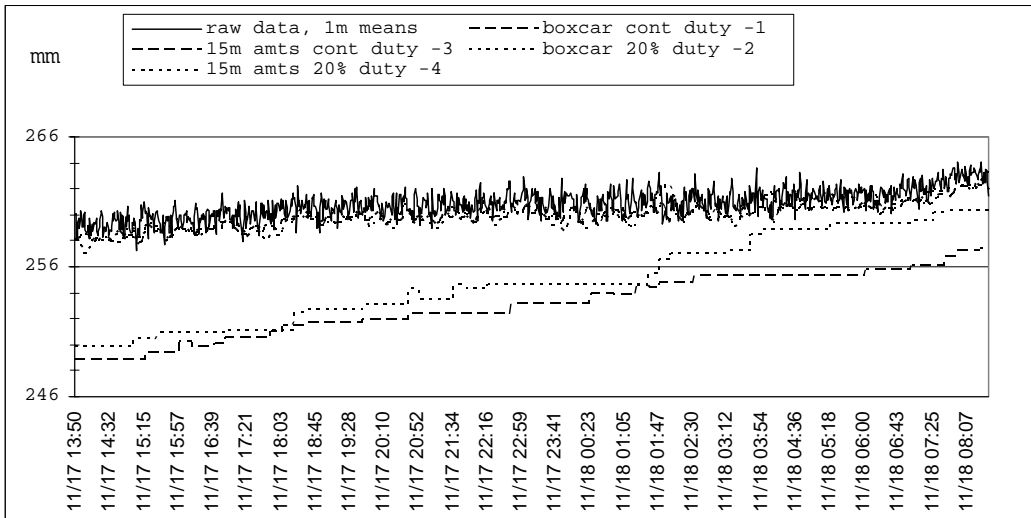


Figure 23: Filter Method, Quebec City minute data, 2002 Nov 17–18

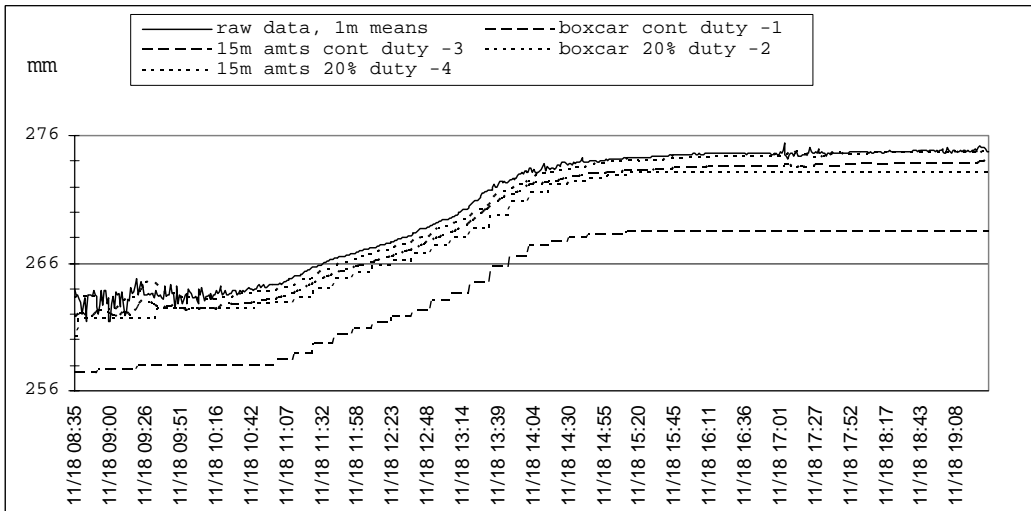


Figure 24: Filter Method, Quebec City minute data, 2002 Nov 18

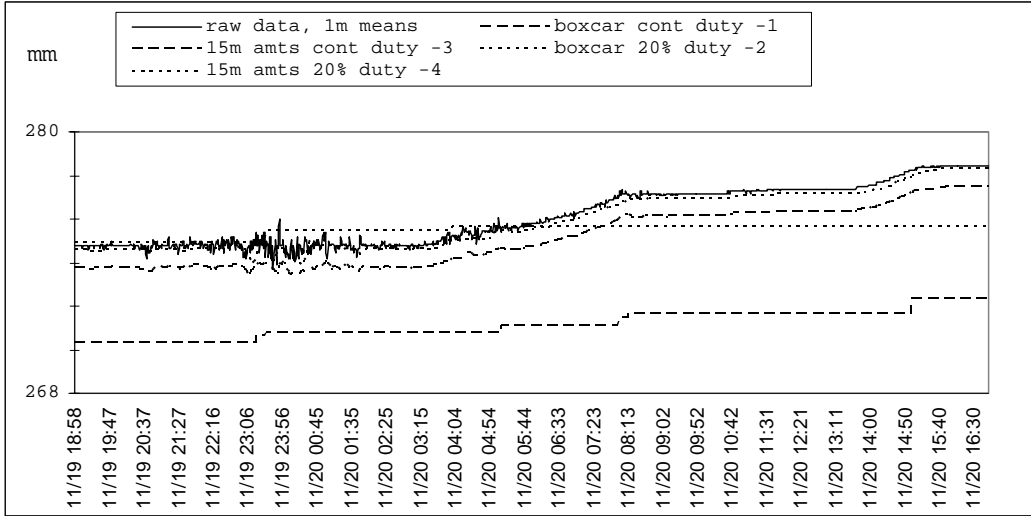


Figure 25: Filter Method, Quebec City minute data, 2002 Nov 19–20

**GRAPHS—NOISE THRESHOLD METHODS**

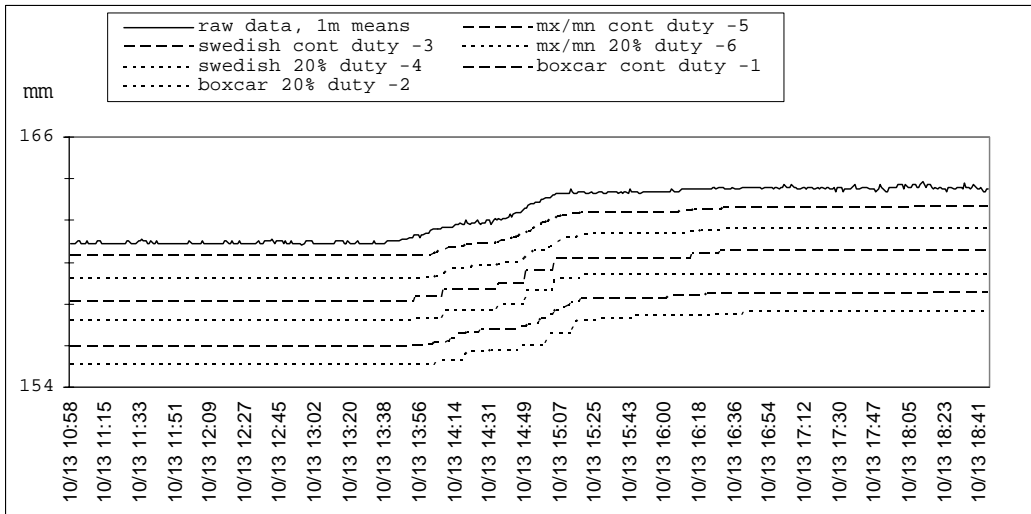


Figure 26: Noise Threshold Methods, Quebec City minute data, 2002 Oct 13

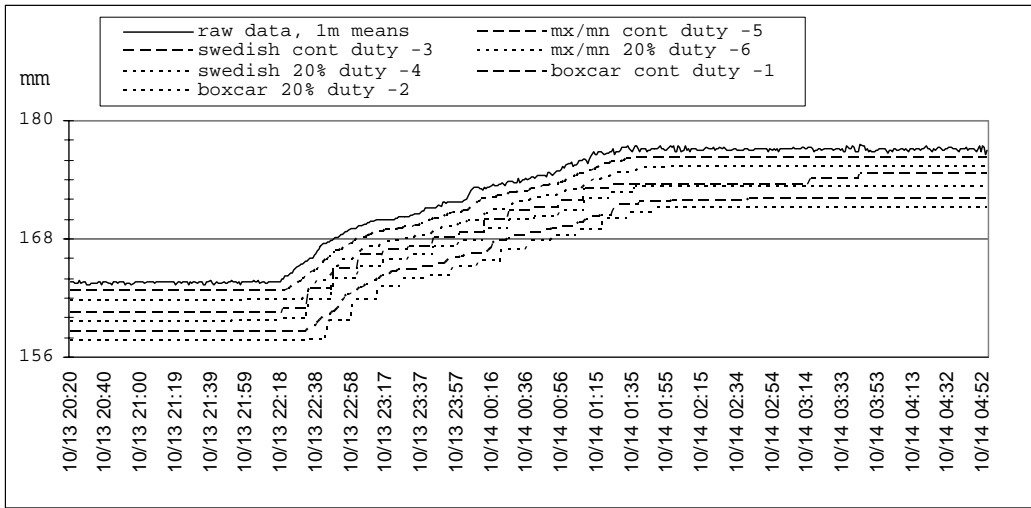


Figure 27: Noise Threshold Methods, Quebec City minute data, 2002 Oct 13–14

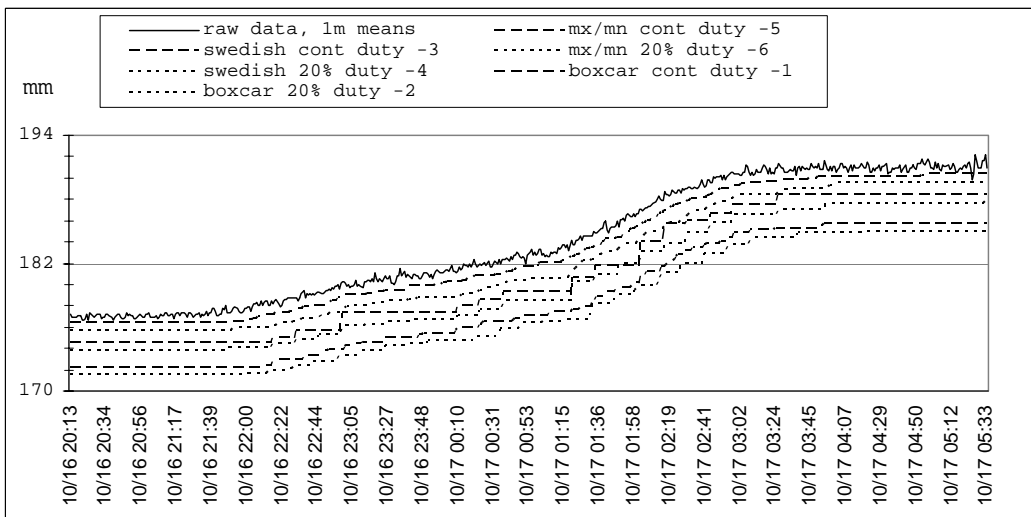


Figure 28: Noise Threshold Methods, Quebec City minute data, 2002 Oct 16–17

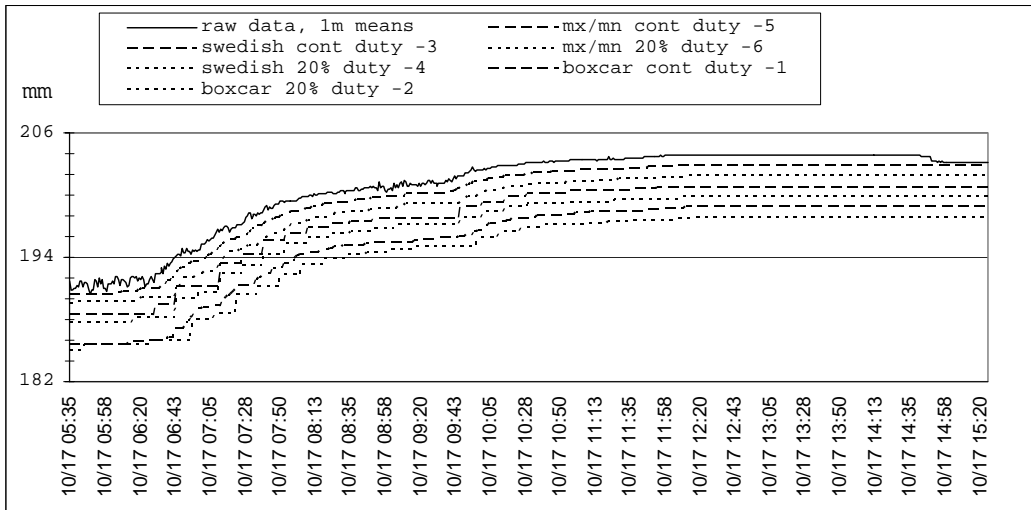


Figure 29: Noise Threshold Methods, Quebec City minute data, 2002 Oct 17

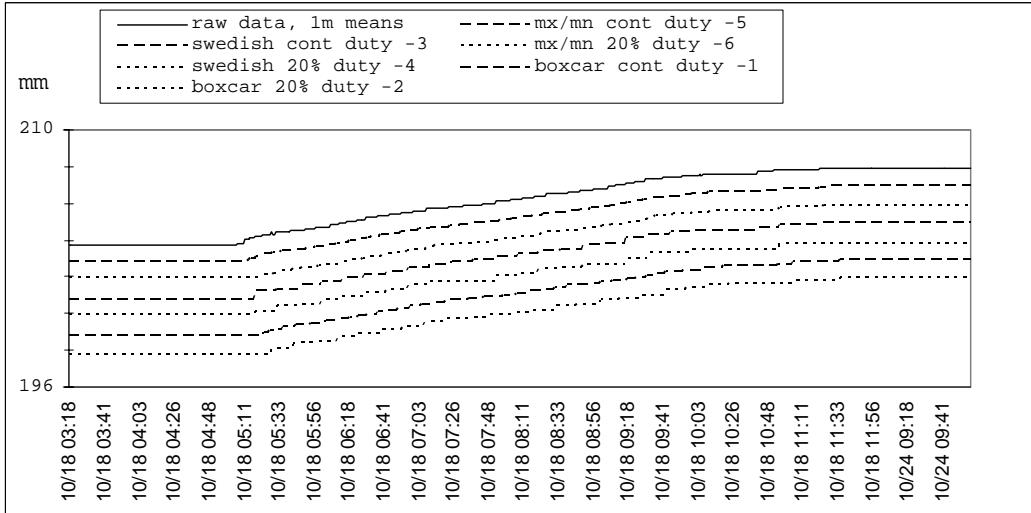


Figure 30: Noise Threshold Methods, Quebec City minute data, 2002 Oct 18

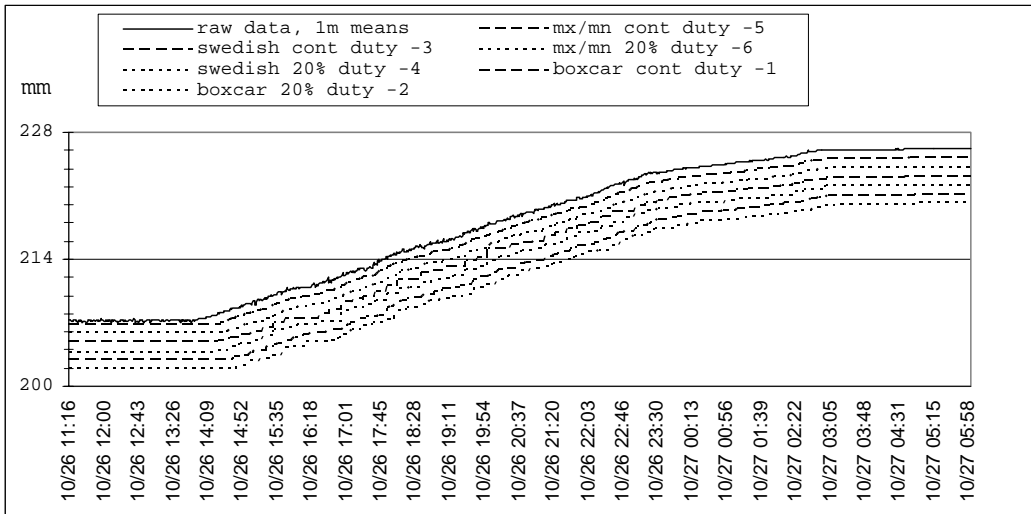


Figure 31: Noise Threshold Methods, Quebec City minute data, 2002 Oct 26–27

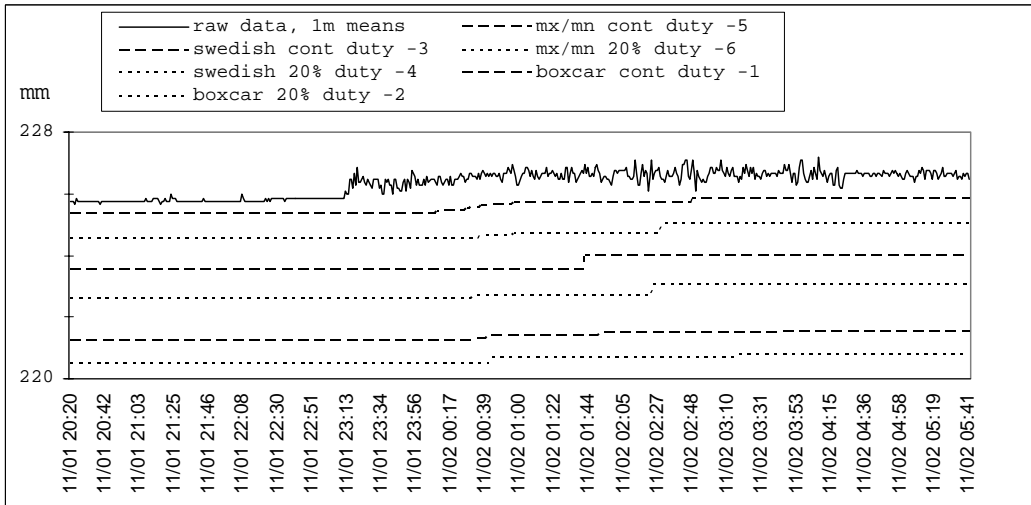


Figure 32: Noise Threshold Methods, Quebec City minute data, 2002 Nov 1–2

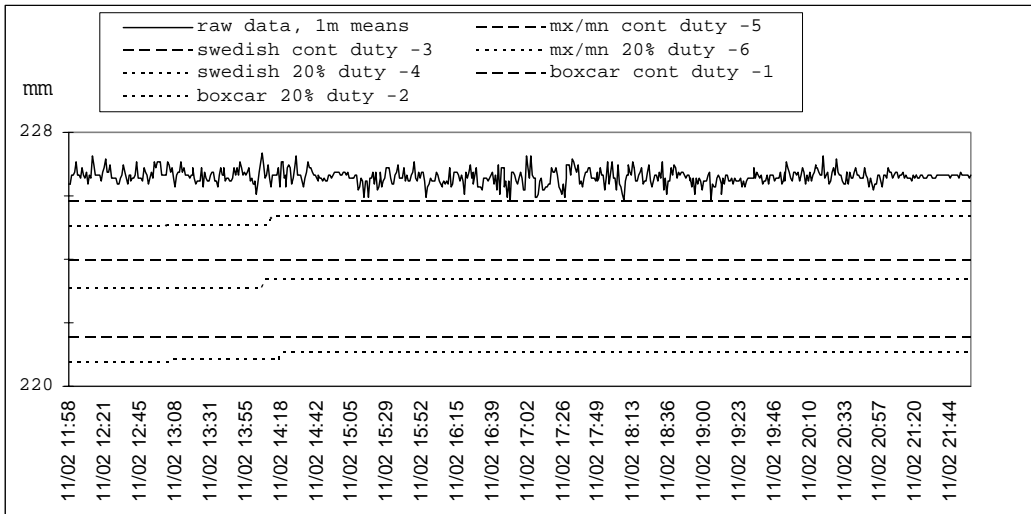


Figure 33: Noise Threshold Methods, Quebec City minute data, 2002 Nov 2

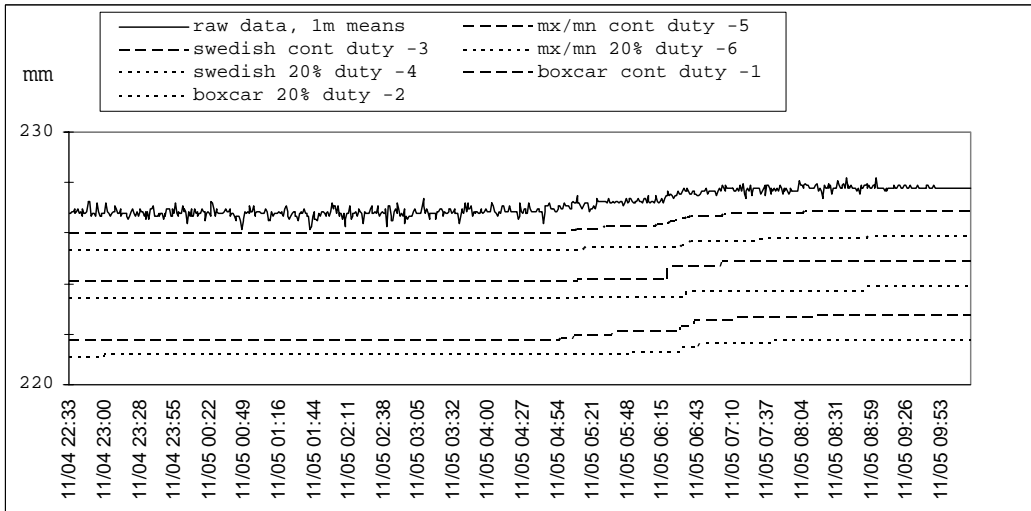


Figure 34: Noise Threshold Methods, Quebec City minute data, 2002 Nov 4-5

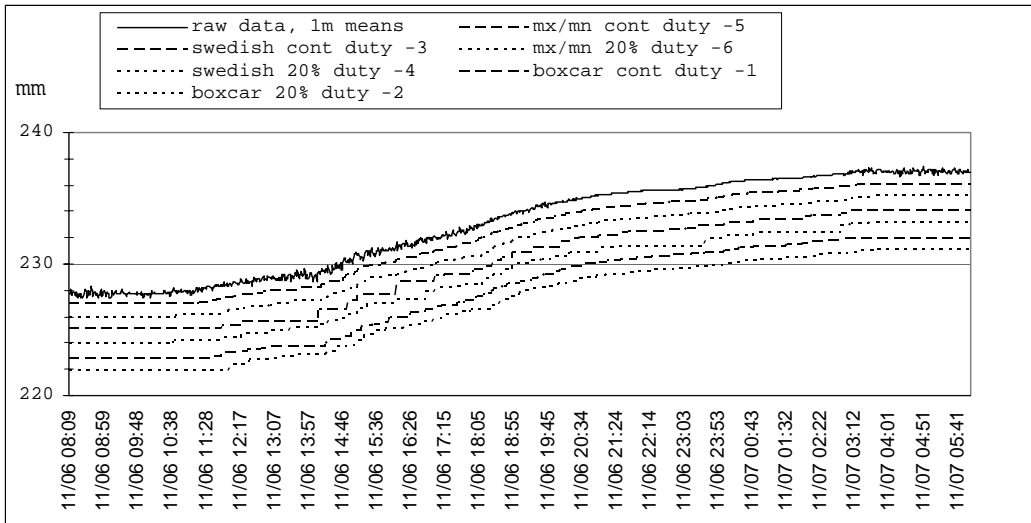


Figure 35: Noise Threshold Methods, Quebec City minute data, 2002 Nov 6

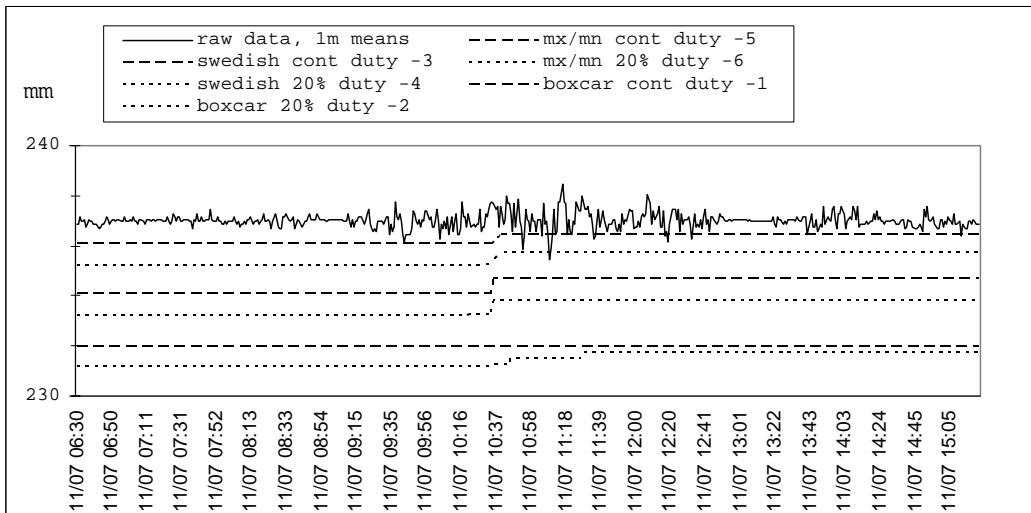


Figure 36: Noise Threshold Methods, Quebec City minute data, 2002 Nov 7

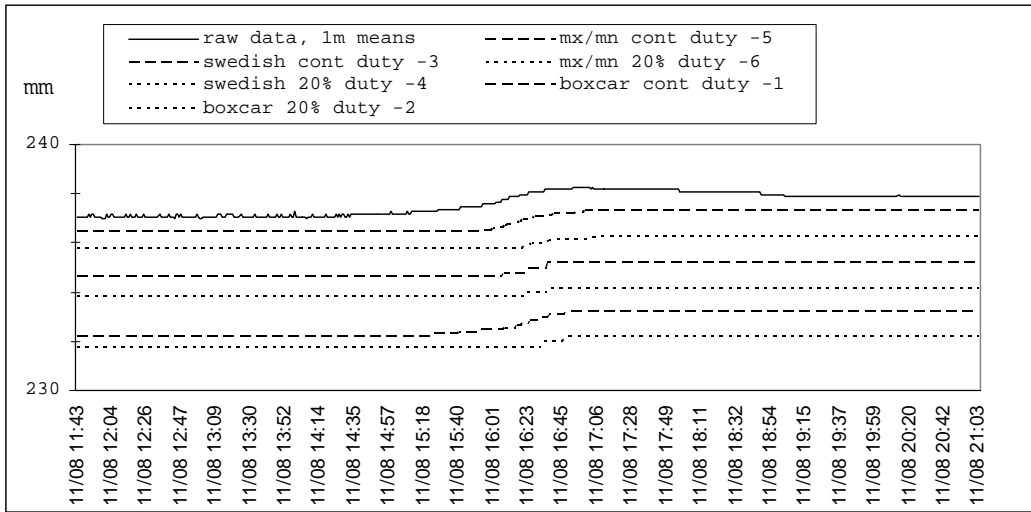


Figure 37: Noise Threshold Methods, Quebec City minute data, 2002 Nov 8

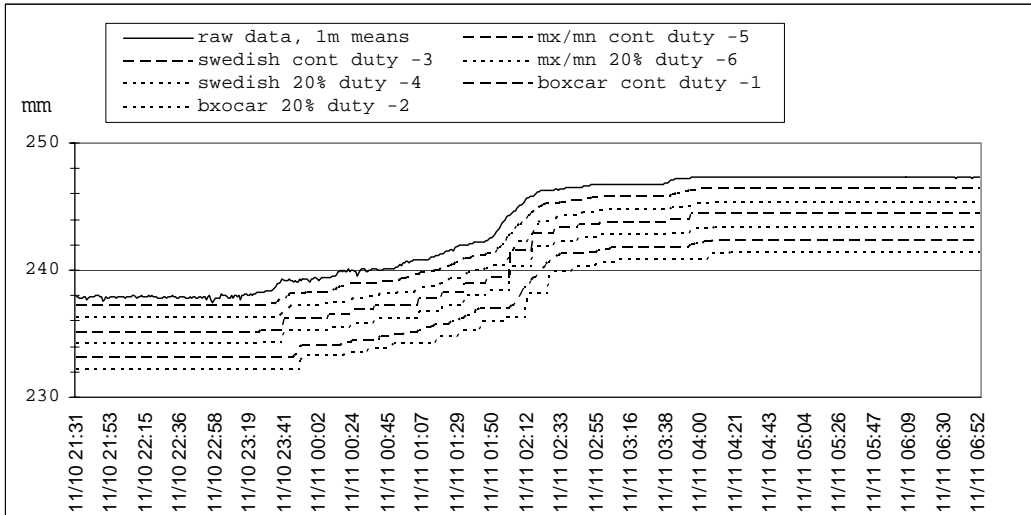


Figure 38: Noise Threshold Methods, Quebec City minute data, 2002 Nov 10–11



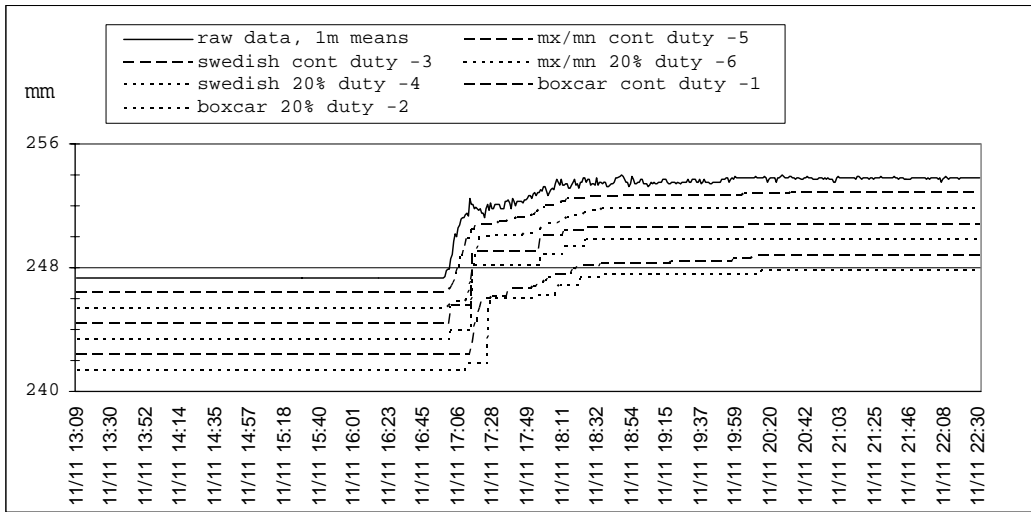


Figure 39: Noise Threshold Methods, Quebec City minute data, 2002 Nov 11

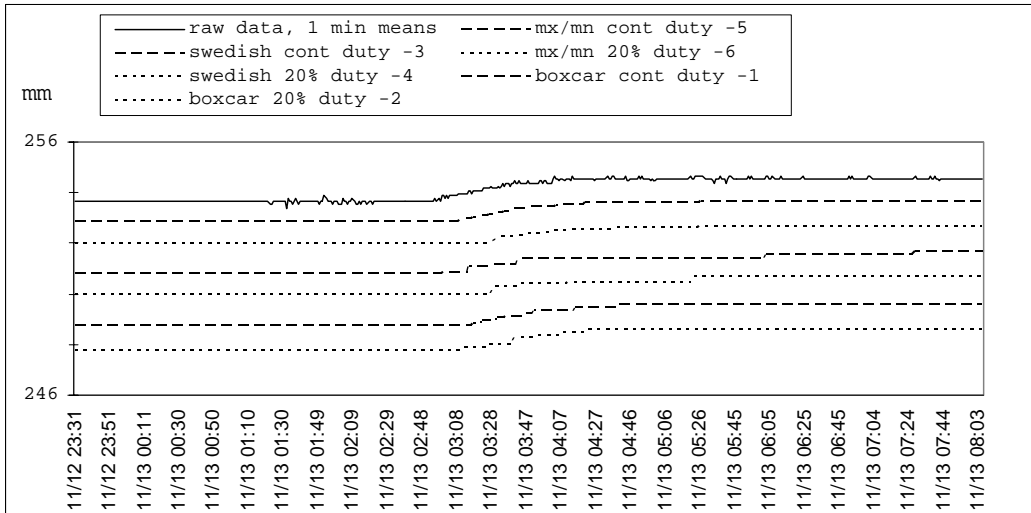


Figure 40: Noise Threshold Methods, Quebec City minute data, 2002 Nov 13

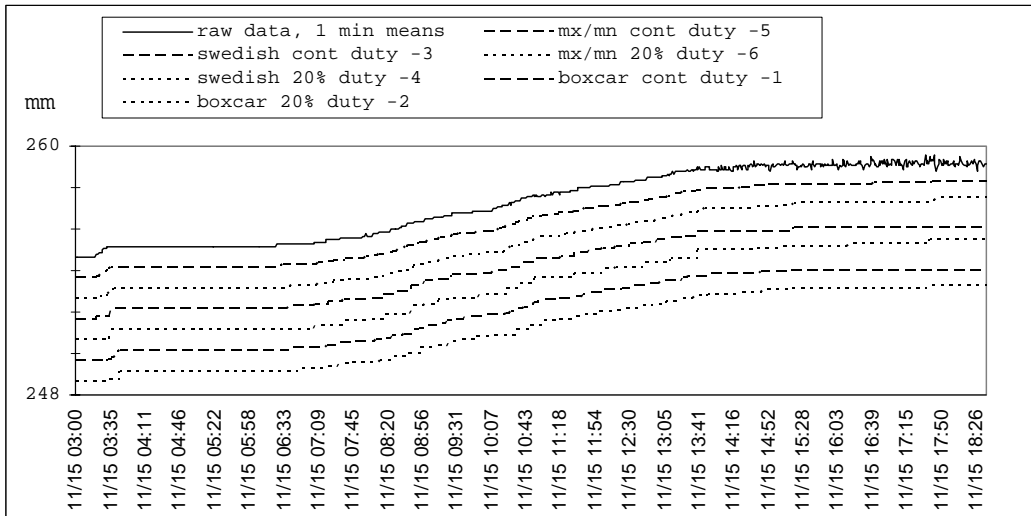


Figure 41: Noise Threshold Methods, Quebec City minute data, 2002 Nov 15

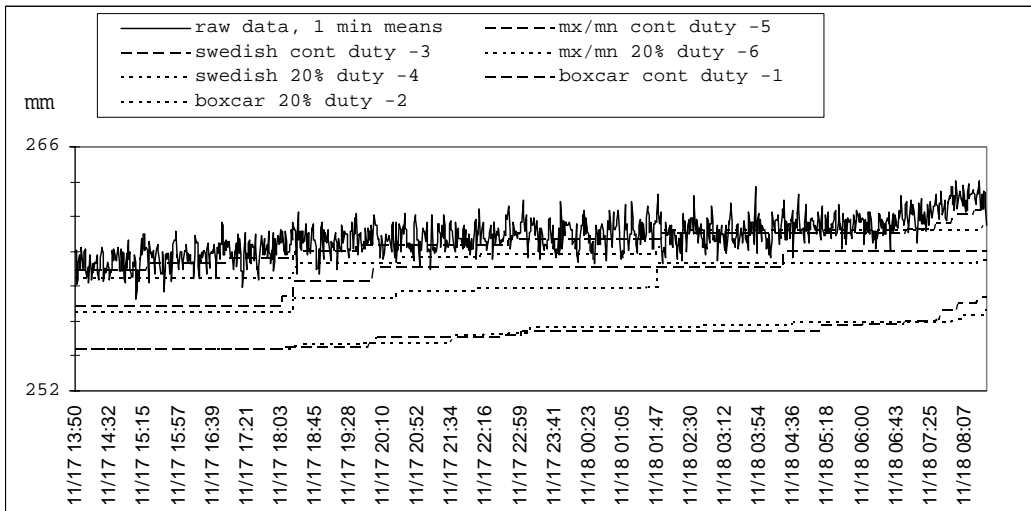


Figure 42: Noise Threshold Methods, Quebec City minute data, 2002 Nov 17-18

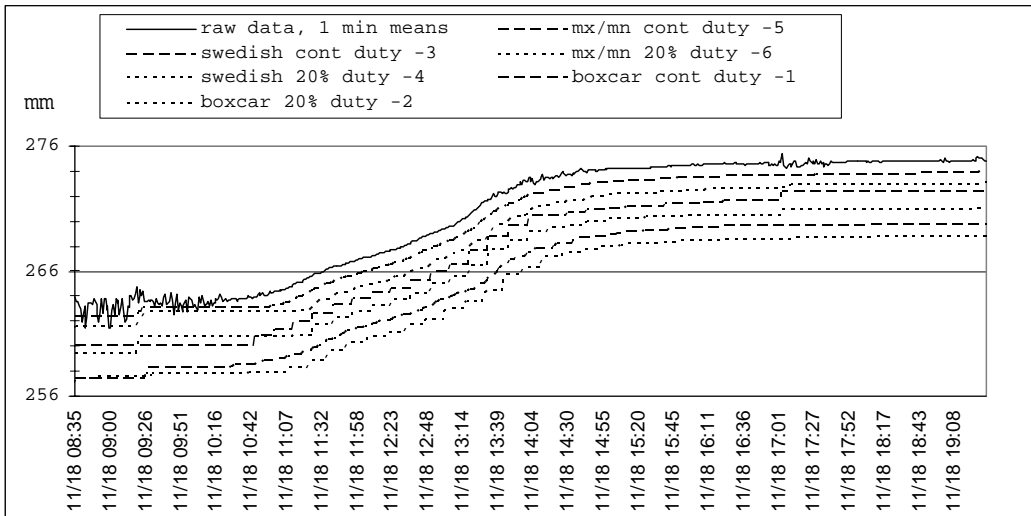


Figure 43: Noise Threshold Methods, Quebec City minute data, 2002 Nov 18

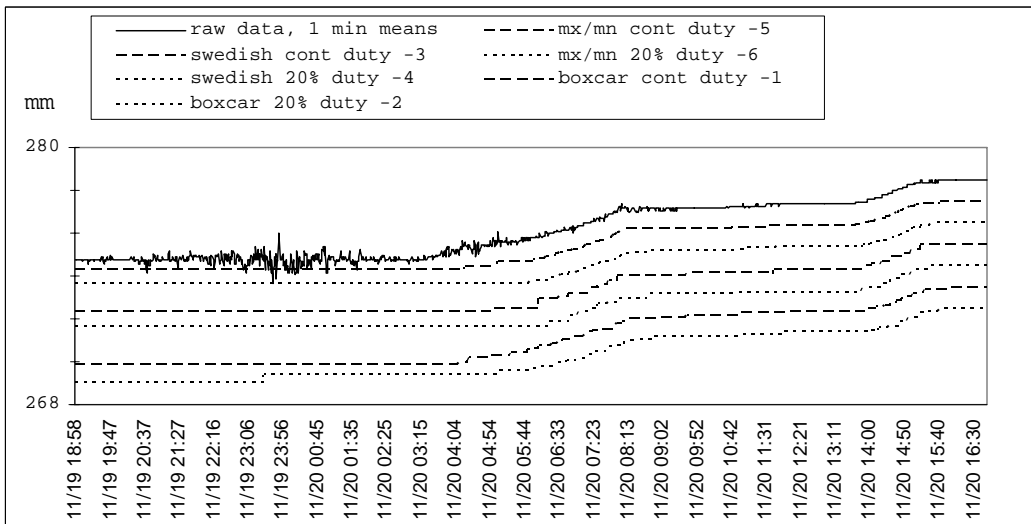


Figure 44: Noise Threshold Methods, Quebec City minute data, 2002 Nov 19–20